



### Junction Box:

- ATEX and IECEx approved.
- CE marked.
- Suitable for installation in harsh environments and hazardous area Zone 0 and Zone 1 dependent on the protection level.
- Direct termination for nVent/Raychem HT cables

### Technical data:

Material: AISI316L/EN 1.4404

Protection: IP 66/67

Ex-protection:  II 2G Ex e IIC T6 Gb

Ta: -20°C ≤ Ta ≤ +40°C EPDM gasket  
-40°C ≤ Ta ≤ +40°C Silicone gasket\*



Finish: Bright chemical dip

Voltage: Up to 500 V / 32 A

Approvals:

ATEX: Nemko 14ATEX1001X

IECEx: IECEx NEM 14.0003X

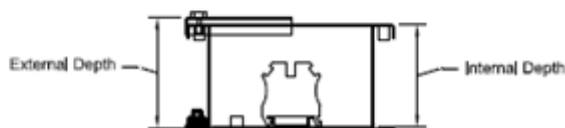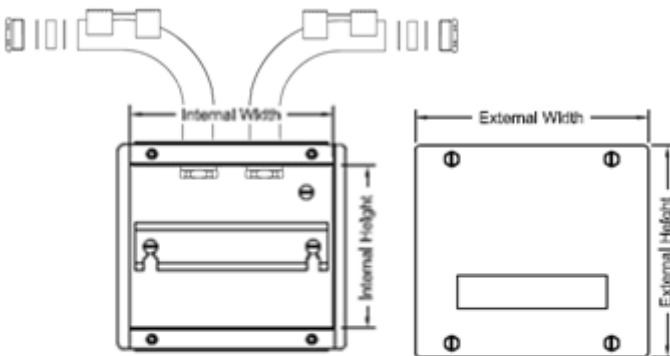

All sizes are in mm.

Type	External (Width)	External (Height)	External (Depth)	Internal (Width)	Internal (Height)	Internal (Depth)	Transition units	Weight	Elcor part.no.
HT-01	134	141	82	100	120	76	1	1,3 kg	1000.050
HT-02	171	154	82	150	120	76	2	1,9 kg	1000.100
HT-03	176	154	106	155	140	100	2	2,3 kg	1000.150
HT-04	241	154	106	220	140	100	2	2,9 kg	1000.200
HT-06	180	154	106	180	120	100	2	2,2 kg	1000.250

\*HT-0XS = Silicone